



D-TACK®


Klebeband



/ Technical Datasheet

D-TACK teboSCHUTZ UV

D-TACK teboPROTECT UV

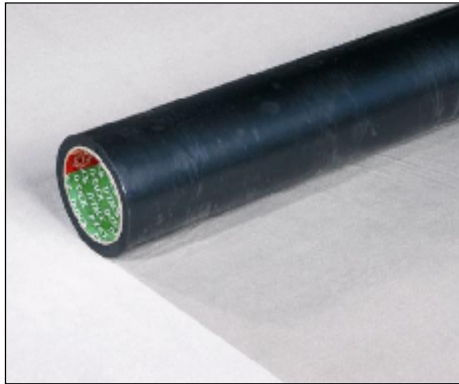

Produktbeschreibung:

- Low tack -

D-TACK teboPROTECT UV

Description:

- Low tack -

The ideal solution for the safe and fast covering of carpeted floors while renovating.

Easy to unroll (glue outside), easy to remove. Very resistant, anti-slip foil.

Effective working and optimal protection until acceptance of construction work with **D-TACK teboPROTECT UV**.

K	Adhesive carrier	Polyolefin - grey transparent
	Adhesive type	Acrylat Acrylate
	Total thickness	50µm +/- 10% (AFERA 4006)
	Tensile strength length/ cross	50 / 40 N / mm ² (ASTM D638)
	Elongation length	570% / 690% (ASTM D638)
	Linear adhesion value	500 g / 25mm (AFERA 4001)
	Unwinding resistance (30cm / min)	(30c /) 50 g / 25mm +/- 10% (AFERA 4013)
	Colour adhesive	Transparent/
	Core diameter	76 mm
	Shelf life	6 20° C 6 months at approx. 20°C
	Width of roll	600 mm, 1000 mm
	Length of roll	50 m
	Special width / length	Available on request

06-2012

Note:

All the technical data are average values. We advice to test the material required to ensure the suitability of intended application. The company reserves the right to improve products and change specifications which may alter performance. Printed 09-2012

D-TACK Klebeband GmbH • Gewerbegebiet Nord • 73457 Essingen/Germany

07365/9633-0 07365/9633-25 www.d-tack.de profis@d-tack.de

